



**FRAC
TANKS**





FRAC AND DRILLING TANKS

SCF Frac and Drilling Tanks are used throughout the oil and gas industry or for on-site storage in the water treatment and chemical storage sectors.

Each unit is designed to allow for the production of a base model with cost effective upgrades for specific requirements. Designs are available in both skid mounted and trailer versions allowing for both fast and cost effective mobilization to remote projects.

Tanks are fitted with 8 inch manifolds with multiple 4 inch couplings. This allows units to be easily combined to tank farms.

Tanks are fitted with AS 1657 compliant stairs as well as mounting points for agitators and Gunn lines.

FEATURES

- Wheeled trailer tanks for fast mobilisation and de-mobilisation
- Skid-mounted with bumpers for cost effective long distance mobilisation
- Intermodal and trailer style format allows cost effective mobilisation to any remote site
- 600mm side access for easy access, cleaning and OHS compliance
- 2 X 500mm hatches in the roof
- Unit fitted with Sump to allow full evacuation
- Full manifold on the rear to allow multiple units to be connected for larger projects
- Central valve on front and rear to allow operation from either end
- Unit designed for the static storage of liquids on site
- Various linings available for all HAZ chemicals
- Designed for temperatures between -19°C to + 120°C


ADDITIONAL OPTIONS

- DNV heli-lift capable unit for remote site air lift or offshore requirement
- Brine and mud mixing
- Sediment separation
- Hook truck compatible

HIRE OR BUY TODAY

SCF services and delivers to all parts of Australia with depots in Adelaide, Melbourne, Darwin, Brisbane, Perth, Sydney and Karratha.

Call 131 132 or visit www.scf.com.au for further information.

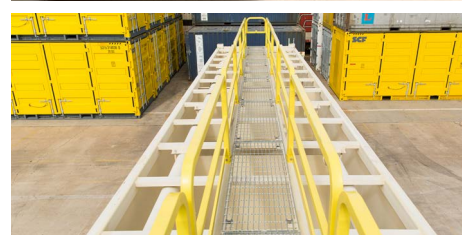

Specifications

	BBL	Payload (kg)	Tare Weight (kg)	Internal (m3)	Internal Dimensions (mm)			External Dimensions (mm)		
					Length	Width	Height	Length	Width	Height
25' skid	250	63 400	5 380	40	6 318	2 318	2 711	7 620	2 500	2 998
45' skid	500	76 000	10 150	77	12 594	2 388	2 651	13 716	2 500	2 896
45' wheeled	500	151 360	12 761	77	12 915	2 268	2 763	14 537	2 500	3 155

Please note: The above specifications should be used as a general guide and are subject to change at any time. Please contact your SCF representative for latest product information.



HEAD OFFICE:
134 Richmond Road
Marleston, South Australia 5033

Freecall 131 132 or visit www.scf.com.au